


TYPICAL SIDE ELEVATION OF SCALE INSTALLATION

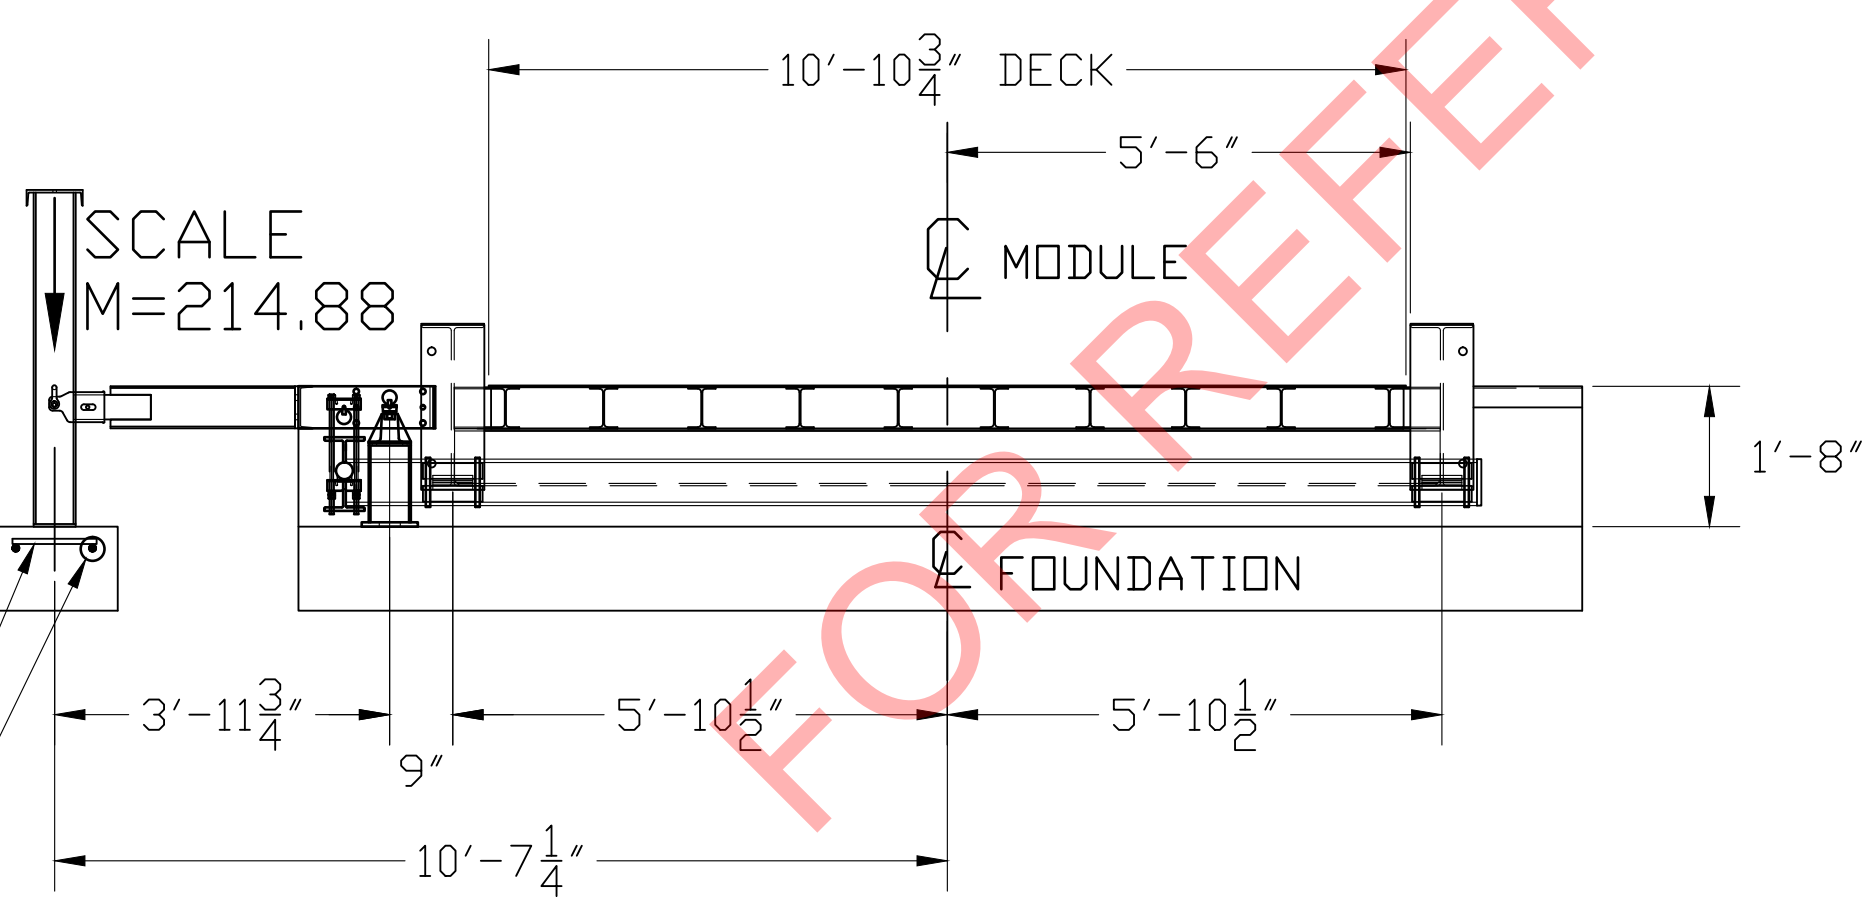

SECTION A-A

FOUNDATION REBAR SCHEDULE					
ASTM A615 GRADE 60					
MARK	QTY.	SIZE	LENGTH	WT.	REMARKS
HR1	32	#4	9'-6"	204	(16) EA. APPROACH LONG.
HR2	79	#4	15'-0"	792	(14) EA. APPROACH LAT; (17) EA. PIER LAT.
HR3	96	#4	3'-0"	193	(32) EA. PIER LONG.
HR4	2	#4	10'-0"	14	(2) DUAL FULCRUM PIER LONG.
HR5	9	#4	1'-4"	8	(3) EA. FULCRUM PIER LAT.
HR6	4	#4	2'-0"	6	(2) EA. FULCRUM PIER & LC PIER LONG.
HR7	3	#4	1'-0"	3	(3) LC PIER LAT.
VR1	64	#4	2'-9"	118	(32) EA. END WALL VERTICAL
				TOTAL WT.	1338

REINFORCING STEEL NOTES:

- REINFORCING STEEL SHALL BE FREE OF ALL MUD, DEBRIS, CEMENT GROUT, LOOSE RUST, GREASE, AND OIL.
- TACK WELDING OF BARS IS PROHIBITED.

CONCRETE REQUIREMENTS	
4000 PSI	
AREA	QTY. (CU. YDS.)
PIERS AS SHOWN	9
APPROACHES	9.5
FLOOR AT 2" THICK	5
OPTIONAL APPROACH SUPPORTS	3
TOTAL	26.5

THIS DRAWING IS SUPPLIED AS CHECKED BELOW:

REFERENCE (ESTIMATES ONLY, NOT FOR CONSTRUCTION)

CERTIFIED FOR CONSTRUCTION, THURMAN #

CUSTOMER: _____

CUSTOMER P.O.# _____ DATE: _____

CUSTOMER APPROVAL, RETURN ONE COPY. (ORDER ON HOLD UNTIL SIGNED COPY IS RETURNED)

APPROVED AS DRAWN, APPROVED BY: _____ DATE: _____

APPROVED AS NOTED, APPROVED BY: _____ DATE: _____

LET	BY	DATE	REVISION

THURMAN SCALE
COLUMBUS, OH

8140 90K CLC
60' X 11' FOOTINGS
FOUNDATION (3 SECTION)

DATE: 11/2/12

SCALE: N/A SHEET 1 OF 1

DRAWN BY: JCR MODEL: _____

CHECKED BY: LC DRAWING NUMBER: 92688-FT

APPROVED BY: LC REVISION: 0

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES FRACTIONS ±1/8" ANGLES ±1° 3-PLACE DECIMAL ±0.005 2-PLACE DECIMAL ±0.05 HOLE DIAMETERS ±1/32"

MATERIAL: A36 FINISH: N/A