




AVENGER SERIES INDUSTRIAL FLOOR SCALES

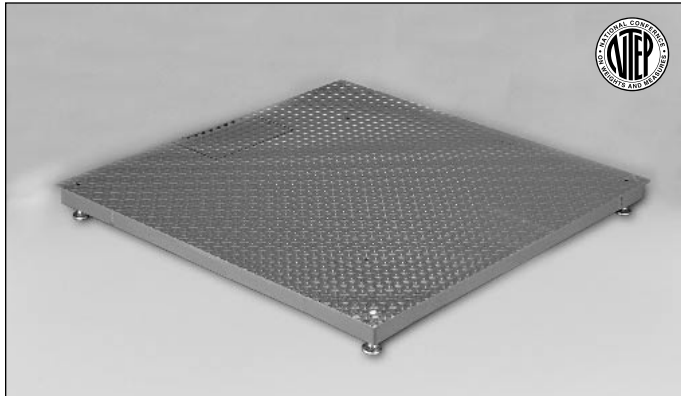

Thurman's Avenger Series industrial floor scales are rugged, mild steel floor scales, ideal for general purpose weighing applications.

LOW PROFILE, RUGGED DESIGN

With a platform height of only three inches, these floor scales allow easy access to and maneuvering of all types of load handling equipment, from drum movers to pallet jacks. The scales feature a structural rib design with a ¼-inch thick steel diamond plate deck. The rugged Avenger Series foot with a high density rubber pad, in conjunction with the NTEP approved load cells and rigid platform structure, ensures many years of accurate weighing.

EASY TO SERVICE

The top access holes at the corners of the scale make height adjustment and leveling easy — using only a screwdriver. All models feature a top access plate for quick and easy access to the stainless steel, NEMA 4X junction box and cornering network. Top access to all components makes installation, calibration and general maintenance easier.

QUICK DISCONNECT & FACTORY CALIBRATION

Only the Avenger Series offers “quick disconnect” and/or factory calibration options. The platform and the indicator are wired together and calibrated at the factory then disconnected and shipped. When they arrive, simply plug the platform and the indicator together, power up and you're ready to go! (In some applications, calibration may be necessary at final destination.)

ADDITIONAL FEATURES


The Avenger Series Floor Scales offer a wide range of optional accessories to better meet your weighing needs. Available accessories include: access ramps, pit frames, bumper guards, foot retainer plates and a quick disconnect plug.

SPECIFICATIONS

- Platform 0.25 inch thick deck with safety tread
- Platform Height 3" on all models
- Overload Capacity 150% of rated scale capacity
- Endloading. 100% of rated scale capacity
- Cable Length Platform to instrument = 25 feet standard
- Construction Type A36 carbon steel
- Paint 100% acrylic emulsion
- Grade Level In operation, scale must be firmly supported at all four corners; and within 3° of level
- Accessories Ramps, bumper guards, pit frames, lifting eyebolts, quick disconnect and factory calibration
- NTEP COC# 92-014

Platform Size	Capacity (lbs)	Capacity (kg)
3 ft x 3 ft	1000 x 0.2 lb	454 x 0.1 kg
3 ft x 3 ft	2500 x 0.5 lb	1136 x 0.2 kg
4 ft x 4 ft	2500 x 0.5 lb	1136 x 0.2 kg
4 ft x 4 ft	5000 x 1 lb	2272 x 0.5 kg
4 ft x 4 ft	10,000 x 2 lbs	4545 x 1 kg
4 ft x 5 ft	5000 x 1 lb	2272 x 0.5 kg
4 ft x 5 ft	10,000 x 2 lbs	4545 x 1 kg
4 ft x 6 ft	5000 x 1 lb	2272 x 0.5 kg
4 ft x 6 ft	10,000 x 2 lbs	4545 x 1 kg
5 ft x 5 ft	5000 x 1 lb	2272 x 0.5 kg
5 ft x 5 ft	10,000 x 2 lbs	4545 x 1 kg
5 ft x 7 ft	5000 x 1 lb	2272 x 0.5 kg
5 ft x 7 ft	10,000 x 2 lbs	4545 x 1 kg

(All capacities and divisions are based on 5000 divisions.)

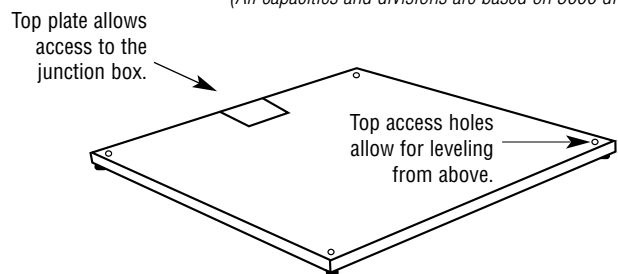

At A Glance™

Models and specifications subject to change without notice. Printed in the USA on recycled paper. © Thurman Scales

Call toll-free for the Thurman representative nearest you:

(800) 688-9741

Internet Address: <http://www.thurmanscale.com>